

NEW PRODUCT TO STOP FATS, OILS & GREASE!!!



PRODUCT SPECIFICATIONS

Model	HEIGHT	WIDTH INCL. CONTAINER	WIDTH OF TANK	INLET HEIGHT	LENGTH	OUTLET HEIGHT
FB 125	410MM	515MM	310MM	240MM	720MM	230MM
FB 225	450MM	515MM	310MM	310MM	890MM	265MM

Model	FLOW RATE	BASKET CAPACITY	BASKET HEIGHT	INLET / OUTLET	GREASE CONTAINER VOLUME
FB 125	1.25 L/S	4 LITRES	260MM	60	5 LITRES
FB 225	2.25 L/S	8 LITRES	260MM	115	5 LITRES

All FatBustas come with 0-80c thermostat, 1200w heating element & 24v motor.
Standard single phase 230v power supply needed.
Timer – 15 minute segment.

www.fat-busta.com

Head Office :

WRT

A15B INDUSTRIAL ESTATE

MARSA, LQA 06, MALTA EUROPE

Tel: 00356 21233296 Fax: 00356 21233297


sales@fat-busta.com

DISTRIBUTOR

NEW PRODUCT TO STOP FATS, OILS & GREASE!!!

FATBUSTA 

*“Separates, traps
and removes your
waste grease,
protecting your
business and meeting
legal requirements!!”*

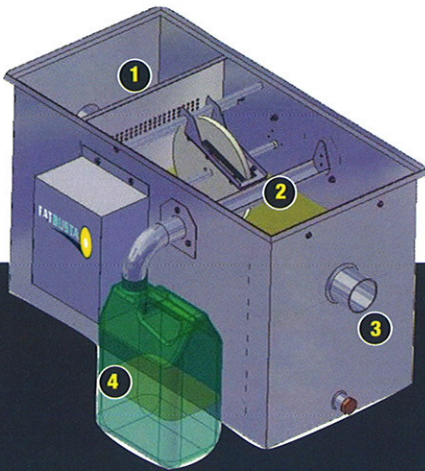

HOW FATBUSTA WORKS

- 1 Solids removed**
Waste water containing fats, oils and grease enters the FatBusta, where larger solid waste is strained in a removable basket.
- 2 Grease trapped**
Grease separates from the cleaner water and rises to the surface where it is trapped in the main chamber.
- 3 Clean water filtered**
The clean water continues under the outlet baffle and down the drain.
- 4 Fats skimmed away**
The trapped fats, oils and grease are heated and then skimmed out into a container at the end of the day.

www.fat-busta.com